EMJAY

3M™ Scotch-Weld DP8610NS FLEXIBLE Acrylic Adhesives

Open the door to potential
with the
3M Scotch-Weld FLEXIBLE
Acrylic Adhesive DP8610NS.

3M Scotch-Weld DP8610NS FLEXIBLE Acrylic Adhesive

Open the door to potential, with the 3M Scotch-Weld FLEXIBLE Acrylic Adhesive DP8610NS.

3M Hi-Strength Non-Flammable Adhesive 98 NF

Highlights:

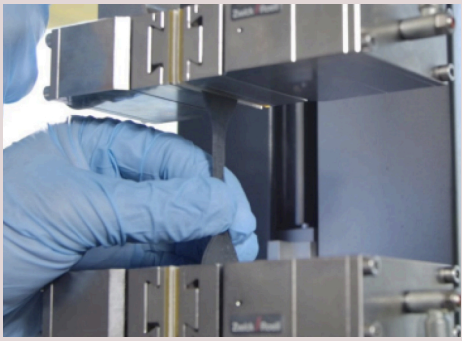

- Key substrates: Adheres to a variety of substrates, including those that are slightly oily.
- Versatile use: Ideal for the transportation, rail and signage industries.
- Highly flexible: Has a structural adhesive offering greater than 200% elongation.

Ultra High Flexibility

With 200% elongation, this adhesive is more flexible than most acrylics, providing gap filling and stress relief when bonding materials with dissimilar coefficients of thermal expansion.

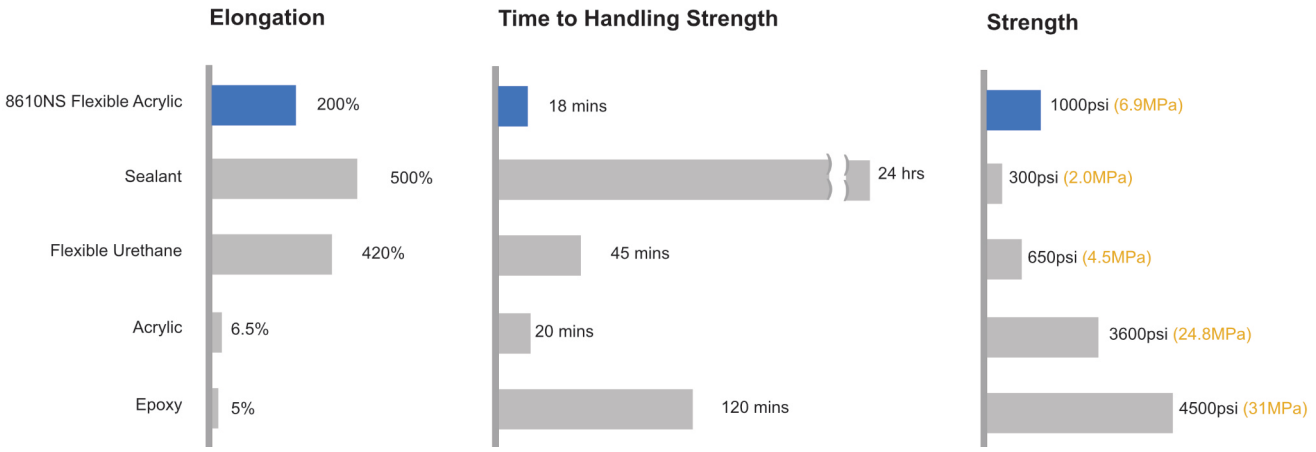

Ultra flexible

- Flexible like a sealant
- High elongation up to 200%
- Limits bondline read-through on thin, flat surfaces
- Opens up new design possibilities

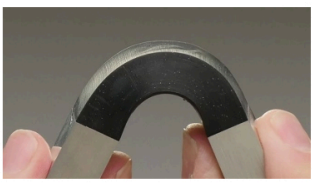

... with the convenience of an acrylic adhesive

- Rapid cure time
- Minimal surface preparation needed, including slightly oily surfaces
- Bonds well to a variety of materials: plastics, composites, painted surfaces, aluminum, stainless steel and active metals

... and worker safety benefits.

- Low odor formula
- Non-flammable classification, does not require special storage
- No GHS08 Health Hazard classification

3M Scotch-Weld DP8610NS FLEXIBLE Acrylic Adhesive

Recommended Applications

Panel-to-frame Bonding

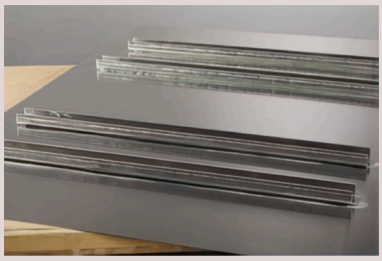

Dissimilar Materials

Glass Panel to Frame

Gap Filling & Bonding

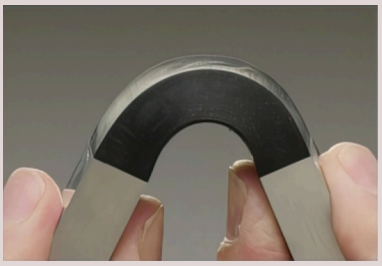

Trailers, Enclosures

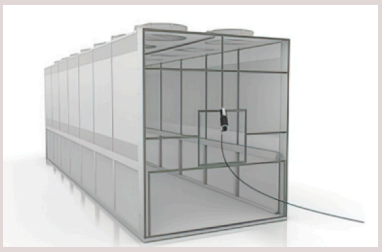

Sporting Goods

Commercial Appliance

Window Bonding

Automotive Display

EMJAY
Adhesive Tapes
Converter
Packaging Specialist

Call: 1300 809 093
emjayproducts.com.au
sales@emjayproducts.com.au
www.emjayproducts.com.au

To learn more about how **Emjay Products** can assist your business with the right product for your application, contact the sales team at **Emjay Products** on **1300 809 093**.

Please note that the technical information and data provided within should be considered representative or typical only and should not be used for specification purposes. User should evaluate the product to determine whether it is fit for a particular purpose and suitable for user's method of application.