EMJAY

3M™ VHB RP+ Adhesive Tapes

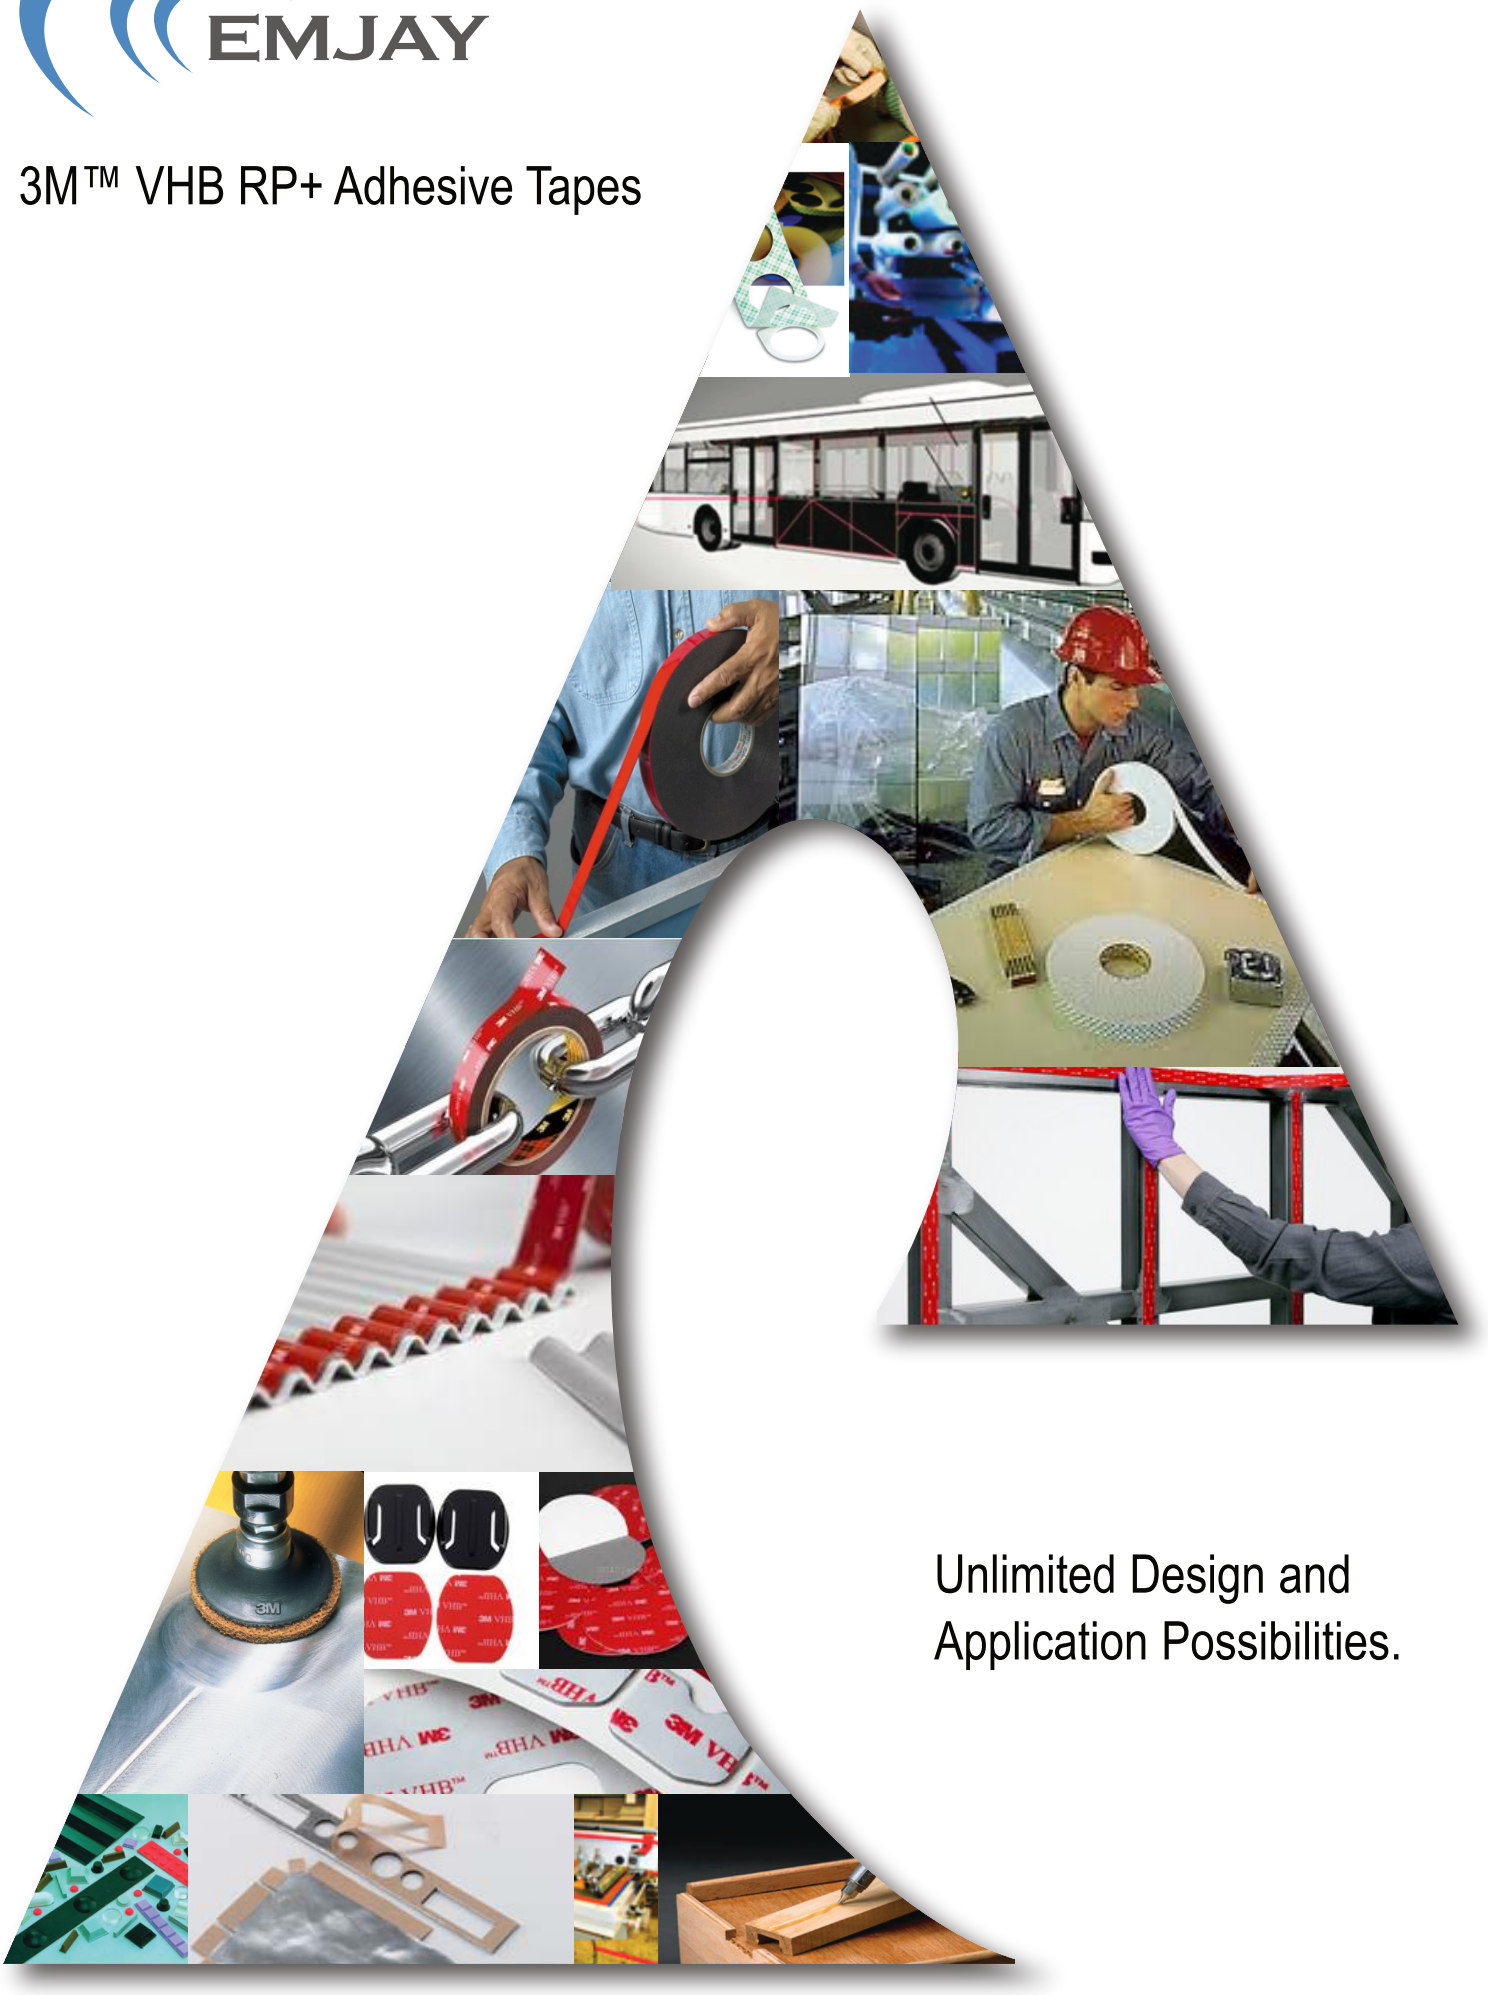

Unlimited Design and
Application Possibilities.

Product	Thickness	Colour	Sample	Features/Applications	
RP+040GF	0.4mm	Grey		3M VHB RP+ Series Foam Tapes are ideal for General Industrial, Interior Fitout and Signage applications. Features a film liner or a paper liner for die cutting solutions. RP+ Tapes utilises modified acrylic adhesive on both sides of a conformable foam core. It is specifically designed for bonding a variety of substrates including many metal, glass, composites, many plastic and painted materials. 3M VHB RP+ Tape range is fast and easy-to-use permanent bonding method provides high strength and long-term durability both indoors and outdoors. Temperature Resistance: Short Term (minutes/hours): 230ºC Long Term (days/weeks): 93ºC 	
RP+060GF	0.6mm	Grey			
RP+080GF	0.8mm	Grey			
RP+110GF	1.1mm	Grey			
RP+160GF	1.6mm	Grey			
5952	1.1mm	Black		VHB 5952 the permanent assembly tape combines the most conformable acrylic foam with modified acrylic adhesive. The result is a tape that adheres to the broadest range of substrates.	3M VHB Acrylic Foam Tape is a double-coated pressure sensitive adhesive tape for bonding a wide range of materials, including many low surface energy plastics and paints in addition to metals and other plastics. The foam is conformable to increase contact with the surfaces.
4941	1.1mm	Grey		All acrylic adhesive and conformable acrylic foam have made the VHB 4941 a proven performer in harsh environments.	

Converting

Converting to die cutting can add value to any product by increasing design flexibility and freeing designers from many constraints, resulting in higher quality finished products.

EMJAY

Adhesive Tapes
Converter
Packaging Specialist

Call: 1300 809 093
emjayproducts.com.au
sales@emjayproducts.com.au
www.emjayproducts.com.au

To learn more about how **Emjay Products** can assist your business with the right product for your application, contact the sales team at **Emjay Products** on **1300 809 093**.

Please note that the technical information and data provided within should be considered representative or typical only and should not be used for specification purposes. User should evaluate the product to determine whether it is fit for a particular purpose and suitable for user's method of application.